



Product Specifications

Customer	
Model	TP-185P0A0CW-003



Records of Revision			
Vision	Modifying	Old Description	New Description
v2107.1	Preliminary specification		



General Description

The TP-185P0A0CW-003 is a Projected Capacitive touch panel, it supports 10 points multi-touch. It is bonded with a 1.1mm, 7H hardness, Soda-lime Tempered cover lens, complies IK rating 07.

The structure of TP-185P0A0CW-003 is "G/G" , optional AG coating.
It is designed by Nextech Co.,Ltd.

Specifications

Type of Touch Technology	Projected Capacitive
Input Method	Finger or Nextech active touch stylus.
Average Transmittance	>85%
Accuracy	2.5mm each target, 10% Jitter
Interface	USB/RS232
Suggested Related Touch Controller	EETI 84H5680 Series.

Dimensions

Outline of Cover Lens	430.20x254.50(±0.3) mm
Dimensions of Sensor	411.80x248.10(±0.3) mm
Viewing Area	410.64x231.24(±0.3) mm
Active Area	411.80x232.40(±0.3) mm
Thickness of Cover Lens	1.1(±0.3) mm
Total Thickness	2.4(±0.3) mm

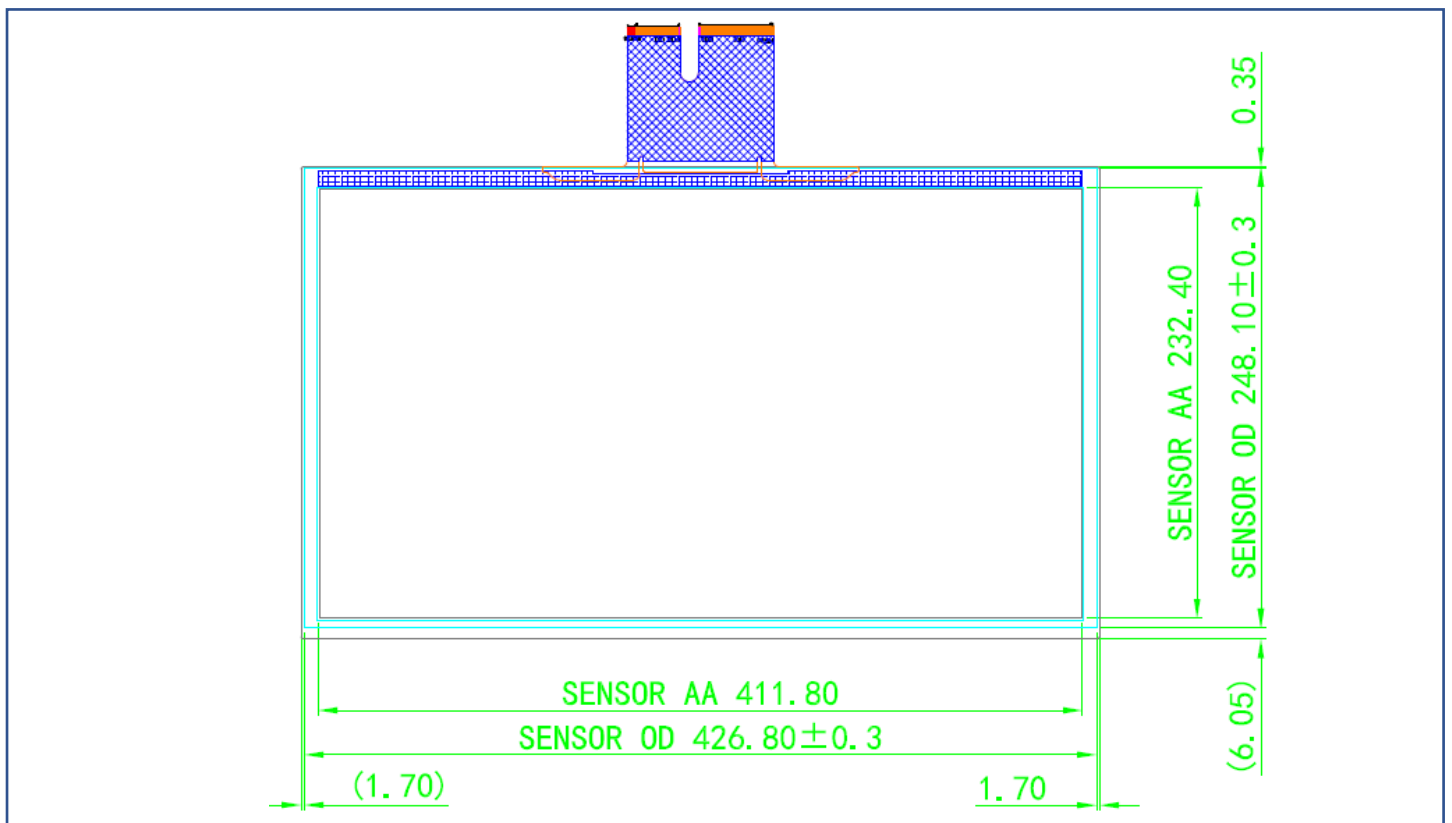
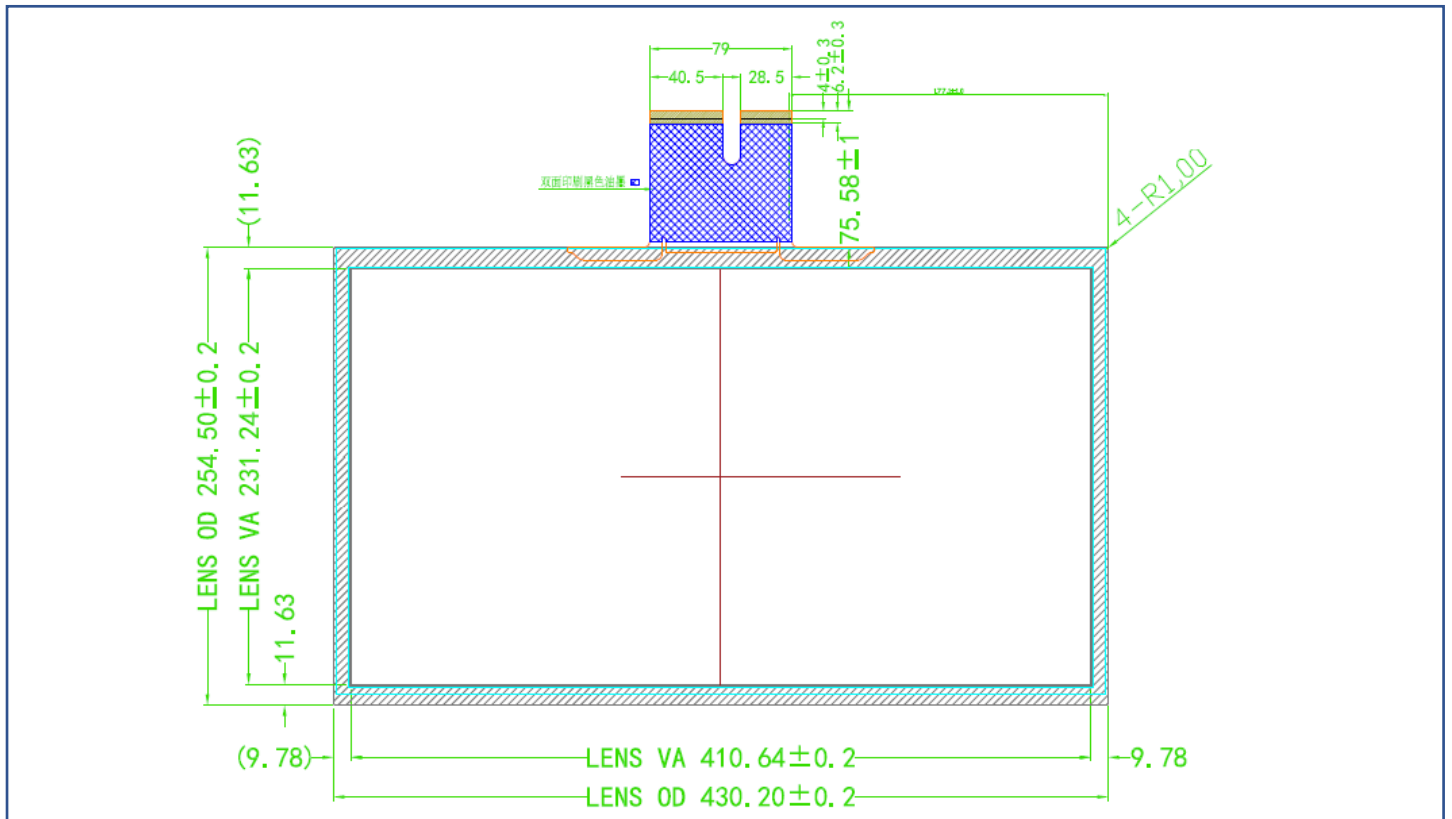
Environmental Characteristic

Item	Temperature	Humidity
Operating	-20~70°C	0~90%RH
Storage	-30~80°C	0~90%RH

Appearance








Dimensions



Reliability Test

Item	Condition	Judge
High temperature	60°C /240 hours	Reliability test may cause the film puffed yet the electric characteristic stays intact.
Low temperature	-20°C /240 hours	
High temperature / humidity	60°C / 95%RH, 240 hours	
Thermal Cycle	40°C ~80°C [30 min/cycle] *50 cycles	
Impact Test	the steel ball falls with beginning 50 centimeters which drops the center of the sample 3 times	


Appearance Inspection

Item	Calculate Method	The standard of determination	
		Size	Allowed Quantity
Spot defect (White/ Black)	$\Phi = (A+B)/2$ 	$0 \leq \Phi \leq 0.5\text{mm}$	∞
		$0.5\text{mm} < \Phi \leq 0.7\text{mm}$	6
		$\Phi > 0.7$	0
Linear defect		$W \leq 0.1\text{mm}$	∞
		$0.1\text{mm} < W \leq 0.15\text{mm}$ $L \leq 8\text{mm}$	5
		$0.1 < W$	0
Bump point	$\Phi = (A+B)/2$ 	$0 \leq \Phi \leq 0.5\text{mm}$	∞
		$0.5\text{mm} < \Phi \leq 0.7\text{mm}$	6
		$\Phi > 0.7$	0
CG chipping/Crack		Front Side: $\Phi \leq 0.15\text{mm}$ $Z \leq T/2$ *	2
		Back Side: Invisible from the front side	∞
		Front Side: $X \leq 0.15\text{mm}$ $Y \leq 0.15\text{mm}$	2



Nextech 18.5" Projected Capacitive Touch Module

TP-185P0A0CW-003

		$Z \leq T/2$ *	
		Back Side: Invisible from the front side	∞
		Any Crack	0
Dirty		Uncleanable	0

* T = Thickness of Glass

Inspection environment conditions :

1. The touch panel has to be inspected at a clean room of at least class 10,000.
2. The visual inspection environment should be set at 15~25°C and 25~75% humidity.
3. The illumination of the appearance inspection should be 800~1000Lux.
4. The visual inspection should be kept the distance 35CM or more between the touch panel and the eyes.
5. The viewing angle should be 45 degree
6. Visual inspection time should be less than 25 seconds.